


MOD 17~33KTL3-X3

- Max. string current up to 20A
- OLED and Touch button
- Type II SPD on DC and AC side
- Low start-up voltage
- Intelligent operation/maintenance and one-click diagnostics
- Supports Aluminum Wire connection

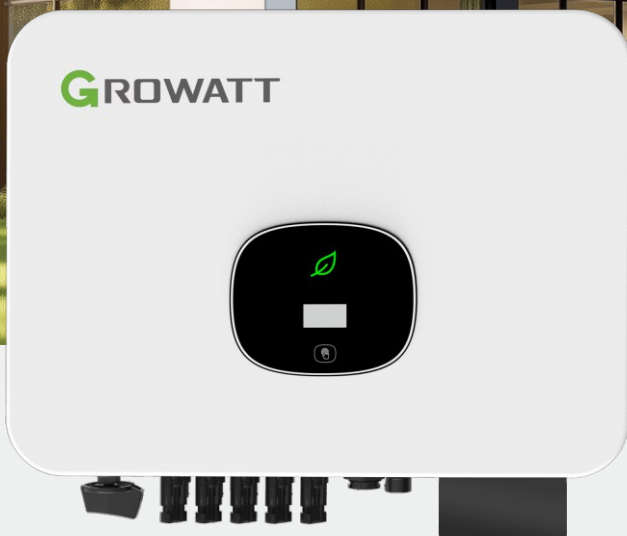

P O W E R
- I N G O
T O M O -
R R O W O

Datasheet	MOD 17KTL3-X3	MOD 20KTL3-X3	MOD 25KTL3-X3	MOD 30KTL3-X3	MOD 33KTL3-X3
Input data (DC)					
Max. recommended PV power (for module STC)	25500W	30000W	37500W	45000W	50000W
Max. DC voltage	1100V				
Start voltage	160V				
Nominal voltage	600V				
MPPT voltage range	140V-1000V				
No. of MPP trackers	2			3	
No. of PV strings per MPP tracker	2/2			2/2/1	
Max. input current per MPP tracker	40A/40A			40A/40A/20A	
Max. short-circuit current per MPP tracker	50A/50A			50A/50A/25A	
Output data (AC)					
AC nominal power	17000W	20000W	25000W	30000W	33000W
Max. AC apparent power	18700VA	22000VA	27500VA	33000VA	36300VA
Nominal AC voltage (range*)	220V/380V, 230V/400V (340-440V)				
AC grid frequency (range*)	50/60 Hz (45-55Hz/55-65 Hz)				
Max. output current	28.3A	33.3A	41.7A	50A	55A
Adjustable power factor	0.8leading...0.8lagging				
THDI	<3%				
AC grid connection type	3W+N+PE				
Efficiency					
MAX. efficiency	98.75%	98.75%	98.75%	98.8%	98.8%
European efficiency	98.5%	98.5%	98.6%	98.6%	98.6%
MPPT efficiency	99.9%				
Protection devices					
DC reverse polarity protection	Yes				
DC Switch	Yes				
AC/DC surge protection	Type II / Type II				
Insulation resistance monitoring	Yes				
AC short-circuit protection	Yes				
Ground fault monitoring	Yes				
Grid monitoring	Yes				
Anti-islanding protection	Yes				
Residual-current monitoring unit	Yes				
String fault monitoring	Yes				
AFCI protection	Optional				
General data					
Dimensions (W / H / D)	435/325/179mm				
Weight	18.8kg			20.2kg	
Operating temperature range	-25°C ... +60°C				
Noise	≤45dB(A)				
Nighttime power consumption	<1W				
Topology	Transformerless				
Cooling	Natural convection				
Protection degree	IP66				
Relative humidity	0~100%				
Altitude	4000m				
DC connection	H4/MC4(Optional)				
AC connection	Waterproof PG connector + OT terminal				
Display	OLED+LED/WIFI+APP				
Interfaces: USB/RS485/WiFi /GPRS/LAN/RF	Yes/Yes/Optional/Optional/Optional/Optional				
Warranty: 5/10 years	Yes/Optional				
CE,IEC62116,IEC62109,IEC61683,IEC60068 BIS,BEE					